


Tangerine Automation Quick Reference Chart

AUTOMATION MODE SELECT




PRESS status switch to scan through automation modes:

OFF --> Write --> Latch --> Read



If in ITB mode, **HOLD** for 2-4 sec. to toggle TRIM ON/OFF
TRIM-Write --> TRIM Latch --> TRIM Read

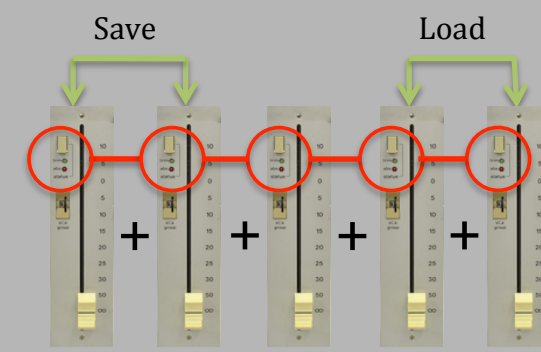

RECALL-IT MODE


ACCESS RECALL-IT MODE

Press, at the same time, any 5 consecutive status switches to enter RECALL-IT mode:


- Press switches 1+2 of this group of switches to SAVE console "snapshot" to DAW midi track on #5 midi out, this will "auto start" DAW in PLAY
- Press switches 4+5 of this group of switches to LOAD console "snapshot" to SSL from DAW midi track on #5 midi in, this will "auto start " and "auto start DAW.

Press the 5 same consecutive status switches to EXIT this mode.

COPY AUTOMATION MODE FROM




PRESS and **HOLD** one status switch to copy it's automation mode. While holding the 1st switch, press other switches to paste the copied automation mode to other channels.

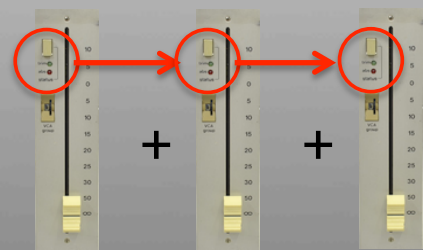

SET ALL AUTOMATION MODE TO...


PRESS and **HOLD** one status switch, and copy it's automation mode to all channels when two other status switches are pressed

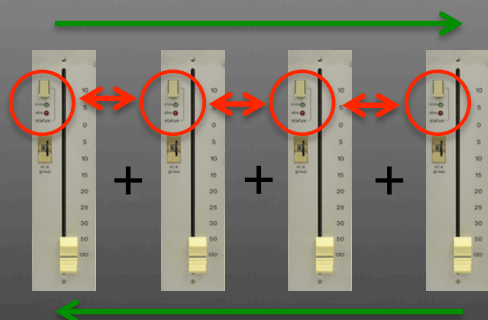

FADER BANK SWITCH

In ITB mix mode, to access 32+ faders:

- **PRESS** any 4-status switches going **UP** to bank switch channel UP in DAW
- **PRESS** any 4-status switches going **DOWN** to bank switch channels DOWN in DAW

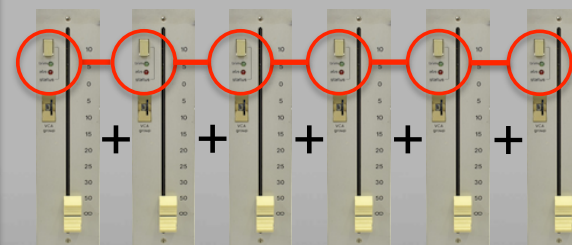

CONFIGURATION MODE

ACCESS CONFIGURATION MODE

Press the first 6 status switches assigned to bank 4 of the Tangerine Automation Interface to enter CONFIGURATION mode: (ex: 25+26+27+28+29+30 or VCA #1+#2+#3+#4+#5+#6)

Press the same 6 consecutive status switches to EXIT this mode.

Automation Mix mode:



FADER/VCA SCALE:



After automation WRITE:



Interface VCA #32 automates:

